


Piston Seals  
Wipers  
Compounds  
Custom Parts  
Specialty Parts  
Services  
Wear Guides  
Rod Seals

QUALITY | VALUE | SERVICE

# O-Rings



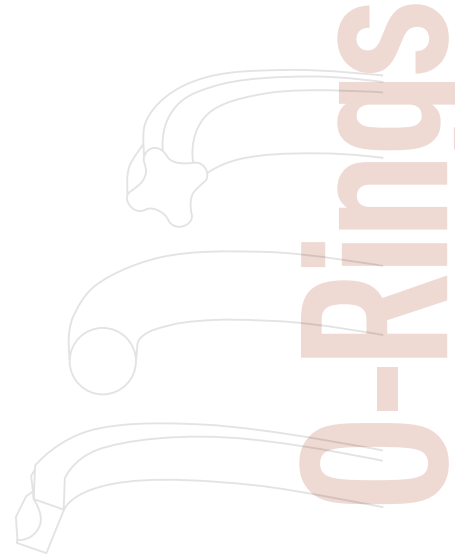

# You need it now! We've got it.

Tired of hearing, "We can get it for you?" RT Dygert's already got it in stock. That's crucial in today's marketplace where you have to seal the deal ASAP. You order, we ship. Same day.

We stock everything from the conventional to the unconventional. The AS568, "Aerospace Size Standard for O-Rings" is generally considered the U.S. size standard. No matter what you're looking for, you'll find it on the chart below. The one thing they all have in common is they're the industry's best.

Set your own standards – If the O-Ring you need simply doesn't exist, we'll create it for you. And if you need help in determining which size and material is perfect for your unique needs, our expert consultants are just a phone call away.

## ALL COMPOUNDS BELOW ARE IN STOCK AND AVAILABLE FOR IMMEDIATE SHIPMENT.

### O-RINGS

<b>NITRILE (NBR)</b>	<b>OPERATING TEMPERATURE*</b> -30° to +250° F	<b>MATERIALS</b> 70 durometer 90 durometer NSF/FDA 70 durometer
<b>VITON™ (FKM)</b>	<b>OPERATING TEMPERATURE*</b> -15° to +400° F	<b>MATERIALS</b> Black 75 durometer Black 90 durometer Brown 75 durometer
<b>ETHYLENE PROPYLENE (EPDM)</b>	<b>OPERATING TEMPERATURE*</b> -60° to +250° F	<b>MATERIALS</b> 70 durometer 90 durometer NSF/FDA 70 durometer
<b>SILICONE (VMQ)</b>	<b>OPERATING TEMPERATURE*</b> -65° to +400° F	<b>MATERIALS</b> 70 durometer
<b>NEOPRENE (CR)</b>	<b>OPERATING TEMPERATURE*</b> -40° to +225° F	<b>MATERIALS</b> 70 durometer
<b>HYDROGENATED NITRILE (HNBR)</b>	<b>OPERATING TEMPERATURE*</b> -25° to +300° F	<b>MATERIALS</b> Green 70 durometer
<b>TEFLON® ENCAPSULATED SILICONE &amp; VITON™</b>	<b>OPERATING TEMPERATURE*</b> -75° to +400° F	<b>MATERIALS</b> Silicone core Viton™ Core
<b>PTFE</b>	<b>OPERATING TEMPERATURE*</b> -300° to +500° F	<b>MATERIALS</b> PTFE (55 shore D)

#### ALSO AVAILABLE UPON REQUEST:

Viton™: All types, Fluorosilicone, Perfluoroelastomer, Polyurethane, Butyl, UL compounds, NSF compounds, Carboxylated Nitrile, PTFE coated, internally lubricated, colored compounds, metric and custom sizes.

\*Operating ranges are approximate and apply to medium hardness (~70 Shore A) compounds. Harder or softer compounds will have different temperature ranges.




Viton™ is a trademark of The Chemours Company FC, LLC, used under license by RT Dygert.

### QUATTRO SEALS™

<b>NITRILE (NBR)</b>	<b>OPERATING TEMPERATURE*</b> -30° to +250° F	<b>MATERIALS</b> 70 durometer
<b>VITON™</b>	<b>OPERATING TEMPERATURE*</b> -15° to +400° F	<b>MATERIALS</b> 75 durometer

### BACKUP RINGS

<b>HYTREL®</b>	<b>OPERATING TEMPERATURE*</b> -40° to +250° F	<b>MATERIALS</b> Dynamic (55 shore D) Static (55 shore D)
<b>NITRILE (NBR)</b>	<b>OPERATING TEMPERATURE*</b> -30° to +250° F	<b>MATERIALS</b> Contoured 90 durometer
<b>PTFE</b>	<b>OPERATING TEMPERATURE*</b> -300° to +500° F	<b>MATERIALS</b> PTFE Split backup rings

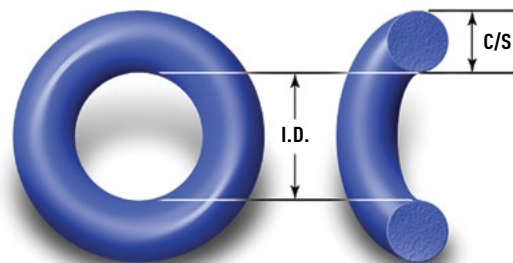

# Service? We run rings around the rest.

For over five decades, RT Dygert has been a world leader in servicing and supplying our customers with only the best quality O-Rings, Custom Molded Rubber Products, Seals and Machined Plastics at very competitive prices. We also offer time and money saving value added services like JIT/Kanban programs, pre-production and kitting, special marking and packaging options and more.

## CROSS SECTION .070" ± .003"

AS568	—Dimensions in Inches—			—Nominal Size—		
	I.D.	±	C/S	I.D.	O.D.	C/S
-001	.029	.004	.040	1/32	3/32	1/32
-002	.042	.004	.050	3/64	9/64	3/64
-003	.056	.004	.060	1/16	3/16	1/16
-004	.070	.005	.070	5/16	13/64	1/16
-005	.101	.005	.070	3/32	7/32	1/16
-006	.114	.005	.070	1/8	1/4	1/16
-007	.145	.005	.070	5/32	9/32	1/16
-008	.176	.005	.070	3/16	5/16	1/16
-009	.208	.005	.070	7/32	11/32	1/16
-010	.239	.005	.070	1/4	3/8	1/16
-011	.301	.005	.070	5/16	7/16	1/16
-012	.364	.005	.070	3/8	1/2	1/16
-013	.426	.005	.070	7/16	9/16	1/16
-014	.489	.005	.070	1/2	5/8	1/16
-015	.551	.007	.070	9/16	11/16	1/16
-016	.614	.009	.070	5/8	3/4	1/16
-017	.676	.009	.070	11/16	13/16	1/16

AS568	—Dimensions in Inches—			—Nominal Size—		
	I.D.	±	C/S	I.D.	O.D.	C/S
-018	.739	.009	.070	3/4	7/8	1/16
-019	.801	.009	.070	13/16	15/16	1/16
-020	.864	.009	.070	7/8	1	1/16
-021	.926	.009	.070	15/16	1-1/16	1/16
-022	.989	.010	.070	1	1-1/8	1/16
-023	1.051	.010	.070	1-1/16	1-3/16	1/16
-024	1.114	.010	.070	1-1/8	1-1/4	1/16
-025	1.176	.011	.070	1-3/16	1-5/16	1/16
-026	1.239	.011	.070	1-1/4	1-3/8	1/16
-027	1.301	.011	.070	1-5/16	1-7/16	1/16
-028	1.364	.013	.070	1-3/8	1-1/2	1/16
-029	1.489	.013	.070	1-1/2	1-5/8	1/16
-030	1.614	.013	.070	1-5/8	1-3/4	1/16
-031	1.739	.015	.070	1-3/4	1-7/8	1/16
-032	1.864	.015	.070	1-7/8	2	1/16
-033	1.989	.018	.070	2	2-1/8	1/16
-034	2.114	.018	.070	2-1/8	2-1/4	1/16

AS568	—Dimensions in Inches—			—Nominal Size—		
	I.D.	±	C/S	I.D.	O.D.	C/S
-035	2.239	.018	.070	2-1/4	2-3/8	1/16
-036	2.364	.018	.070	2-3/8	2-1/2	1/16
-037	2.489	.018	.070	2-1/2	2-5/8	1/16
-038	2.614	.020	.070	2-5/8	2-3/4	1/16
-039	2.739	.020	.070	2-3/4	2-7/8	1/16
-040	2.864	.020	.070	2-7/8	3	1/16
-041	2.989	.024	.070	3	3-1/8	1/16
-042	3.239	.024	.070	3-1/4	3-3/8	1/16
-043	3.489	.024	.070	3-1/2	3-5/8	1/16
-044	3.739	.027	.070	3-3/4	3-7/8	1/16
-045	3.989	.027	.070	4	4-1/8	1/16
-046	4.239	.030	.070	4-1/4	4-3/8	1/16
-047	4.489	.030	.070	4-1/2	4-5/8	1/16
-048	4.739	.030	.070	4-3/4	4-7/8	1/16
-049	4.989	.037	.070	5	5-1/8	1/16
-050	5.239	.037	.070	5-1/4	5-3/8	1/16

## CROSS SECTION .103" ± .003"

AS568	—Dimensions in Inches—			—Nominal Size—		
	I.D.	±	C/S	I.D.	O.D.	C/S
-102	.049	.005	.103	1/16	1/4	3/32
-103	.081	.005	.103	3/32	9/32	3/32
-104	.112	.005	.103	1/8	5/16	3/32
-105	.143	.005	.103	5/32	11/32	3/32
-106	.174	.005	.103	3/16	3/8	3/32
-107	.206	.005	.103	7/32	13/32	3/32
-108	.237	.005	.103	1/4	7/16	3/32
-109	.299	.005	.103	5/16	1/2	3/32
-110	.362	.005	.103	3/8	9/16	3/32
-111	.424	.005	.103	7/16	5/8	3/32
-112	.487	.005	.103	1/2	11/16	3/32
-113	.549	.007	.103	9/16	3/4	3/32
-114	.612	.009	.103	5/8	13/16	3/32
-115	.674	.009	.103	11/16	7/8	3/32
-116	.737	.009	.103	3/4	15/16	3/32
-117	.799	.010	.103	13/16	1	3/32
-118	.862	.010	.103	7/8	1-1/16	3/32
-119	.924	.010	.103	15/16	1-1/8	3/32
-120	.987	.010	.103	1	1-3/16	3/32
-121	1.049	.010	.103	1-1/16	1-1/4	3/32
-122	1.112	.010	.103	1-1/8	1-5/16	3/32
-123	1.174	.012	.103	1-3/16	1-3/8	3/32
-124	1.237	.012	.103	1-1/4	1-7/16	3/32
-125	1.299	.012	.103	1-5/16	1-1/2	3/32
-126	1.362	.012	.103	1-3/8	1-9/16	3/32
-127	1.424	.012	.103	1-7/16	1-5/8	3/32

AS568	—Dimensions in Inches—			—Nominal Size—		
	I.D.	±	C/S	I.D.	O.D.	C/S
-128	1.487	.012	.103	1-1/2	1-11/16	3/32
-129	1.549	.015	.103	1-9/16	1-3/4	3/32
-130	1.612	.015	.103	1-5/8	1-13/16	3/32
-131	1.674	.015	.103	1-11/16	1-7/8	3/32
-132	1.737	.015	.103	1-3/4	1-15/16	3/32
-133	1.799	.015	.103	1-13/16	2	3/32
-134	1.862	.015	.103	1-7/8	2-1/16	3/32
-135	1.925	.017	.103	1-15/16	2-1/8	3/32
-136	1.987	.017	.103	2	2-3/16	3/32
-137	2.050	.017	.103	2-1/16	2-1/4	3/32
-138	2.112	.017	.103	2-1/8	2-5/16	3/32
-139	2.175	.017	.103	2-3/16	2-3/8	3/32
-140	2.237	.017	.103	2-1/4	2-7/16	3/32
-141	2.300	.020	.103	2-5/16	2-1/2	3/32
-142	2.362	.020	.103	2-3/8	2-9/16	3/32
-143	2.425	.020	.103	2-7/16	2-5/8	3/32
-144	2.487	.020	.103	2-1/2	2-11/16	3/32
-145	2.550	.020	.103	2-9/16	2-3/4	3/32
-146	2.612	.020	.103	2-5/8	2-13/16	3/32
-147	2.675	.022	.103	2-11/16	2-7/8	3/32
-148	2.737	.022	.103	2-3/4	2-15/16	3/32
-149	2.800	.022	.103	2-13/16	3	3/32
-150	2.862	.022	.103	2-7/8	3-1/16	3/32
-151	2.987	.024	.103	3	3-3/16	3/32
-152	3.237	.024	.103	3-1/4	3-7/16	3/32
-153	3.487	.024	.103	3-1/2	3-11/16	3/32

AS568	—Dimensions in Inches—			—Nominal Size—		
	I.D.	±	C/S	I.D.	O.D.	C/S
-154	3.737	.028	.103	3-3/4	3-15/16	3/32
-155	3.987	.028	.103	4	4-3/16	3/32
-156	4.237	.030	.103	4-1/4	4-7/16	3/32
-157	4.487	.030	.103	4-1/2	4-11/16	3/32
-158	4.737	.030	.103	4-3/4	4-15/16	3/32
-159	4.987	.035	.103	5	5-3/16	3/32
-160	5.237	.035	.103	5-1/4	5-7/16	3/32
-161	5.487	.035	.103	5-1/2	5-11/16	3/32
-162	5.737	.035	.103	5-3/4	5-15/16	3/32
-163	5.987	.035	.103	6	6-3/16	3/32
-164	6.237	.040	.103	6-1/4	6-7/16	3/32
-165	6.487	.040	.103	6-1/2	6-11/16	3/32
-166	6.737	.040	.103	6-3/4	6-15/16	3/32
-167	6.987	.040	.103	7	7-3/16	3/32
-168	7.237	.045	.103	7-1/4	7-7/16	3/32
-169	7.487	.045	.103	7-1/2	7-11/16	3/32
-170	7.737	.045	.103	7-3/4	7-15/16	3/32
-171	7.987	.045	.103	8	8-3/16	3/32
-172	8.237	.050	.103	8-1/4	8-7/16	3/32
-173	8.487	.050	.103	8-1/2	8-11/16	3/32
-174	8.737	.050	.103	8-3/4	8-15/16	3/32
-175	8.987	.050	.103	9	9-3/16	3/32
-176	9.237	.055	.103	9-1/4	9-7/16	3/32
-177	9.487	.055	.103	9-1/2	9-11/16	3/32
-178	9.737	.055	.103	9-3/4	9-15/16	3/32

## CROSS SECTION .139" ± .004"

AS568	—Dimensions in Inches—			—Nominal Size—		
	I.D.	±	C/S	I.D.	O.D.	C/S
-201	.171	.005	.139	3/16	7/16	1/8
-202	.234	.005	.139	1/4	1/2	1/8
-203	.296	.005	.139	5/16	9/16	1/8
-204	.359	.005	.139	3/8	5/8	1/8
-205	.421	.005	.139	7/16	11/16	1/8
-206	.484	.005	.139	1/2	3/4	1/8
-207	.546	.007	.139	9/16	13/16	1/8
-208	.609	.009	.139	5/8	7/8	1/8
-209	.671	.009	.139	11/16	15/16	1/8
-210	.734	.010	.139	3/4	1	1/8
-211	.796	.010	.139	13/16	1-1/16	1/8
-212	.859	.010	.139	7/8	1-1/8	1/8
-213	.921	.010	.139	15/16	1-3/16	1/8
-214	.984	.010	.139	1	1-1/4	1/8
-215	1.046	.010	.139	1-1/16	1-5/16	1/8
-216	1.109	.012	.139	1-1/8	1-3/8	1/8
-217	1.171	.012	.139	1-3/16	1-7/16	1/8
-218	1.234	.012	.139	1-1/4	1-1/2	1/8
-219	1.296	.012	.139	1-5/16	1-9/16	1/8
-220	1.359	.012	.139	1-3/8	1-5/8	1/8
-221	1.421	.012	.139	1-7/16	1-11/16	1/8
-222	1.484	.015	.139	1-1/2	1-3/4	1/8
-223	1.609	.015	.139	1-5/8	1-7/8	1/8
-224	1.734	.015	.139	1-3/4	2	1/8
-225	1.859	.018	.139	1-7/8	2-1/8	1/8
-226	1.984	.018	.139	2	2-1/4	1/8
-227	2.109	.018	.139	2-1/8	2-3/8	1/8
-228	2.234	.020	.139	2-1/4	2-1/2	1/8

AS568	—Dimensions in Inches—			—Nominal Size—		
	I.D.	±	C/S	I.D.	O.D.	C/S
-229	2.359	.020	.139	2-3/8	2-5/8	1/8
-230	2.484	.020	.139	2-1/2	2-3/4	1/8
-231	2.609	.020	.139	2-5/8	2-7/8	1/8
-232	2.734	.024	.139	2-3/4	3	1/8
-233	2.859	.024	.139	2-7/8	3-1/8	1/8
-234	2.984	.024	.139	3	3-1/4	1/8
-235	3.109	.024	.139	3-1/8	3-3/8	1/8
-236	3.234	.024	.139	3-1/4	3-1/2	1/8
-237	3.359	.024	.139	3-3/8	3-5/8	1/8
-238	3.484	.024	.139	3-1/2	3-3/4	1/8
-239	3.609	.028	.139	3-5/8	3-7/8	1/8
-240	3.734	.028	.139	3-3/4	4	1/8
-241	3.859	.028	.139	3-7/8	4-1/8	1/8
-242	3.984	.028	.139	4	4-1/4	1/8
-243	4.109	.028	.139	4-1/8	4-3/8	1/8
-244	4.234	.030	.139	4-1/4	4-1/2	1/8
-245	4.359	.030	.139	4-3/8	4-5/8	1/8
-246	4.484	.030	.139	4-1/2	4-3/4	1/8
-247	4.609	.030	.139	4-5/8	4-7/8	1/8
-248	4.734	.030	.139	4-3/4	5	1/8
-249	4.859	.035	.139	4-7/8	5-1/8	1/8
-250	4.984	.035	.139	5	5-1/4	1/8
-251	5.109	.035	.139	5-1/8	5-3/8	1/8
-252	5.234	.035	.139	5-1/4	5-1/2	1/8
-253	5.359	.035	.139	5-3/8	5-5/8	1/8
-254	5.484	.035	.139	5-1/2	5-3/4	1/8
-255	5.609	.035	.139	5-5/8	5-7/8	1/8
-256	5.734	.035	.139	5-3/4	6	1/8

AS568	—Dimensions in Inches—			—Nominal Size—		
	I.D.	±	C/S	I.D.	O.D.	C/S
-257	5.859	.035	.139	5-7/8	6-1/8	1/8
-258	5.984	.035	.139	6	6-1/4	1/8
-259	6.234	.040	.139	6-1/4	6-1/2	1/8
-260	6.484	.040	.139	6-1/2	6-3/4	1/8
-261	6.734	.040	.139	6-3/4	7	1/8
-262	6.984	.040	.139	7	7-1/4	1/8
-263	7.234	.045	.139	7-1/4	7-1/2	1/8
-264	7.484	.045	.139	7-1/2	7-3/4	1/8
-265	7.734	.045	.139	7-3/4	8	1/8
-266	7.984	.045	.139	8	8-1/4	1/8
-267	8.234	.050	.139	8-1/4	8-1/2	1/8
-268	8.484	.050	.139	8-1/2	8-3/4	1/8
-269	8.734	.050	.139	8-3/4	9	1/8
-270	8.984	.050	.139	9	9-1/4	1/8
-271	9.234	.055	.139	9-1/4	9-1/2	1/8
-272	9.484	.055	.139	9-1/2	9-3/4	1/8
-273	9.734	.055	.139	9-3/4	10	1/8
-274	9.984	.055	.139	10	10-1/4	1/8
-275	10.484	.055	.139	10-1/2	10-3/4	1/8
-276	10.984	.065	.139	11	11-1/4	1/8
-277	11.484	.065	.139	11-1/2	11-3/4	1/8
-278	11.984	.065	.139	12	12-1/4	1/8
-279	12.984	.065	.139	13	13-1/4	1/8
-280	13.984	.065	.139	14	14-1/4	1/8
-281	14.984	.065	.139	15	15-1/4	1/8
-282	15.955	.075	.139	16	16-1/4	1/8
-283	16.955	.080	.139	17	17-1/4	1/8
-284	17.955	.085	.139	18	18-1/4	1/8

## CROSS SECTION .210" ± .005"

AS568	—Dimensions in Inches—			—Nominal Size—		
	I.D.	±	C/S	I.D.	O.D.	C/S
-309	.412	.005	.210	7/16	13/16	3/16
-310	.475	.005	.210	1/2	7/8	3/16
-311	.537	.007	.210	9/16	15/16	3/16
-312	.600	.009	.210	5/8	1	3/16
-313	.662	.009	.210	11/16	1-1/16	3/16
-314	.725	.010	.210	3/4	1-1/8	3/16
-315	.787	.010	.210	13/16	1-3/16	3/16
-316	.850	.010	.210	7/8	1-1/4	3/16
-317	.912	.010	.210	15/16	1-5/16	3/16
-318	.975	.010	.210	1	1-3/8	3/16
-319	1.037	.010	.210	1-1/16	1-7/16	3/16
-320	1.100	.012	.210	1-1/8	1-1/2	3/16
-321	1.162	.012	.210	1-3/16	1-9/16	3/16
-322	1.225	.012	.210	1-1/4	1-5/8	3/16
-323	1.287	.012	.210	1-5/16	1-11/16	3/16
-324	1.350	.012	.210	1-3/8	1-3/4	3/16
-325	1.475	.015	.210	1-1/2	1-7/8	3/16
-326	1.600	.015	.210	1-5/8	2	3/16
-327	1.725	.015	.210	1-3/4	2-1/8	3/16
-328	1.850	.015	.210	1-7/8	2-1/4	3/16
-329	1.975	.018	.210	2	2-3/8	3/16
-330	2.100	.018	.210	2-1/8	2-1/2	3/16
-331	2.225	.018	.210	2-1/4	2-5/8	3/16
-332	2.350	.018	.210	2-3/8	2-3/4	3/16
-333	2.475	.020	.210	2-1/2	2-7/8	3/16
-334	2.600	.020	.210	2-5/8	3	3/16
-335	2.725	.020	.210	2-3/4	3-1/8	3/16
-336	2.850	.020	.210	2-7/8	3-1/4	3/16
-337	2.975	.024	.210	3	3-3/8	3/16

AS568	—Dimensions in Inches—			—Nominal Size—		
	I.D.	±	C/S	I.D.	O.D.	C/S
-338	3.100	.024	.210	3-1/8	3-1/2	3/16
-339	3.225	.024	.210	3-1/4	3-5/8	3/16
-340	3.350	.024	.210	3-3/8	3-3/4	3/16
-341	3.475	.024	.210	3-1/2	3-7/8	3/16
-342	3.600	.028	.210	3-5/8	4	3/16
-343	3.725	.028	.210	3-3/4	4-1/8	3/16
-344	3.850	.028	.210	3-7/8	4-1/4	3/16
-345	3.975	.028	.210	4	4-3/8	3/16
-346	4.100	.028	.210	4-1/8	4-1/2	3/16
-347	4.225	.030	.210	4-1/4	4-5/8	3/16
-348	4.350	.030	.210	4-3/8	4-3/4	3/16
-349	4.475	.030	.210	4-1/2	4-7/8	3/16
-350	4.600	.030	.210	4-5/8	5	3/16
-351	4.725	.030	.210	4-3/4	5-1/8	3/16
-352	4.850	.030	.210	4-7/8	5-1/4	3/16
-353	4.975	.037	.210	5	5-3/8	3/16
-354	5.100	.037	.210	5-1/8	5-1/2	3/16
-355	5.225	.037	.210	5-1/4	5-5/8	3/16
-356	5.350	.037	.210	5-3/8	5-3/4	3/16
-357	5.475	.037	.210	5-1/2	5-7/8	3/16
-358	5.600	.037	.210	5-5/8	6	3/16
-359	5.725	.037	.210	5-3/4	6-1/8	3/16
-360	5.850	.037	.210	5-7/8	6-1/4	3/16
-361	5.975	.037	.210	6	6-3/8	3/16
-362	6.225	.040	.210	6-1/4	6-5/8	3/16
-363	6.475	.040	.210	6-1/2	6-7/8	3/16
-364	6.725	.040	.210	6-3/4	7-1/8	3/16
-365	6.975	.040	.210	7	7-3/8	3/16
-366	7.225	.045	.210	7-1/4	7-5/8	3/16

AS568	—Dimensions in Inches—			—Nominal Size—		
	I.D.	±	C/S	I.D.	O.D.	C/S
-367	7.475	.045	.210	7-1/2	7-7/8	3/16
-368	7.725	.045	.210	7-3/4	8-1/8	3/16
-369	7.975	.045	.210	8	8-3/8	3/16
-370	8.225	.050	.210	8-1/4	8-5/8	3/16
-371	8.475	.050	.210	8-1/2	8-7/8	3/16
-372	8.725	.050	.210	8-3/4	9-1/8	3/16
-373	8.975	.050	.210	9	9-3/8	3/16
-374	9.225	.055	.210	9-1/4	9-5/8	3/16
-375	9.475	.055	.210	9-1/2	9-7/8	3/16
-376	9.725	.055	.210	9-3/4	10-1/8	3/16
-377	9.975	.055	.210	10	10-3/8	3/16
-378	10.475	.060	.210	10-1/2	10-7/8	3/16
-379	10.975	.060	.210	11	11-3/8	3/16
-380	11.475	.065	.210	11-1/2	11-7/8	3/16
-381	11.975	.065	.210	12	12-3/8	3/16
-382	12.975	.065	.210	13	13-3/8	3/16
-383	13.975	.070	.210	14	14-3/8	3/16
-384	14.975	.070	.210	15	15-3/8	3/16
-385	15.955	.075	.210	16	16-3/8	3/16
-386	16.955	.080	.210	17	17-3/8	3/16
-387	17.955	.085	.210	18	18-3/8	3/16
-388	18.955	.090	.210	19	19-3/8	3/16
-389	19.955	.095	.210	20	20-3/8	3/16
-390	20.955	.095	.210	21	21-3/8	3/16
-391	21.955	.100	.210	22	22-3/8	3/16
-392	22.940	.105	.210	23	23-3/8	3/16
-393	23.940	.110	.210	24	24-3/8	3/16
-394	24.940	.115	.210	25	25-3/8	3/16
-395	25.940	.120	.210	26	26-3/8	3/16

We're your source for expertise in virtually every area, including materials, design, prototyping, testing and more. We'll work with you to set up a custom just-in-time delivery program. Our Electronic Data Interchange (EDI) reduces even more costs and time. We'll barcode all incoming and outgoing shipments for easy verification and to streamline your receiving process.

When it comes to serving you, we're as reliable as our O-Rings. For more information, quick quotations, expert consultation and responsive customer service call us at 866.783.8883 or visit [www.rtdyger.com](http://www.rtdyger.com).

QUALITY | VALUE | SERVICE

## CROSS SECTION .275" ± .006"

AS568	— Dimensions in Inches —			— Nominal Size —		
	I.D.	±	C/S	I.D.	O.D.	C/S
-425	4.475	.033	.275	4-1/2	5	1/4
-426	4.600	.033	.275	4-5/8	5-1/8	1/4
-427	4.725	.033	.275	4-3/4	5-1/4	1/4
-428	4.850	.033	.275	4-7/8	5-3/8	1/4
-429	4.975	.037	.275	5	5-1/2	1/4
-430	5.100	.037	.275	5-1/8	5-5/8	1/4
-431	5.225	.037	.275	5-1/4	5-3/4	1/4
-432	5.350	.037	.275	5-3/8	5-7/8	1/4
-433	5.475	.037	.275	5-1/2	6	1/4
-434	5.600	.037	.275	5-5/8	6-1/8	1/4
-435	5.725	.037	.275	5-3/4	6-1/4	1/4
-436	5.850	.037	.275	5-7/8	6-3/8	1/4
-437	5.975	.037	.275	6	6-1/2	1/4
-438	6.225	.040	.275	6-1/4	6-3/4	1/4
-439	6.475	.040	.275	6-1/2	7	1/4
-440	6.725	.040	.275	6-3/4	7-1/4	1/4
-441	6.975	.040	.275	7	7-1/2	1/4

AS568	— Dimensions in Inches —			— Nominal Size —		
	I.D.	±	C/S	I.D.	O.D.	C/S
-442	7.225	.045	.275	7-1/4	7-3/4	1/4
-443	7.475	.045	.275	7-1/2	8	1/4
-444	7.725	.045	.275	7-3/4	8-1/4	1/4
-445	7.975	.045	.275	8	8-1/2	1/4
-446	8.475	.055	.275	8-1/2	9	1/4
-447	8.975	.055	.275	9	9-1/2	1/4
-448	9.475	.055	.275	9-1/2	10	1/4
-449	9.975	.055	.275	10	10-1/2	1/4
-450	10.475	.060	.275	10-1/2	11	1/4
-451	10.975	.060	.275	11	11-1/2	1/4
-452	11.475	.060	.275	11-1/2	12	1/4
-453	11.975	.060	.275	12	12-1/2	1/4
-454	12.475	.060	.275	12-1/2	13	1/4
-455	12.975	.060	.275	13	13-1/2	1/4
-456	13.475	.070	.275	13-1/2	14	1/4
-457	13.975	.070	.275	14	14-1/2	1/4
-458	14.475	.070	.275	14-1/2	15	1/4

AS568	— Dimensions in Inches —			— Nominal Size —		
	I.D.	±	C/S	I.D.	O.D.	C/S
-459	14.975	.070	.275	15	15-1/2	1/4
-460	15.475	.070	.275	15-1/2	16	1/4
-461	15.955	.075	.275	16	16-1/2	1/4
-462	16.455	.075	.275	16-1/2	17	1/4
-463	16.955	.080	.275	17	17-1/2	1/4
-464	17.455	.085	.275	17-1/2	18	1/4
-465	17.955	.085	.275	18	18-1/2	1/4
-466	18.455	.085	.275	18-1/2	19	1/4
-467	18.955	.090	.275	19	19-1/2	1/4
-468	19.455	.090	.275	19-1/2	20	1/4
-469	19.955	.095	.275	20	20-1/2	1/4
-470	20.955	.095	.275	21	21-1/2	1/4
-471	21.955	.100	.275	22	22-1/2	1/4
-472	22.940	.105	.275	23	23-1/2	1/4
-473	23.940	.110	.275	24	24-1/2	1/4
-474	24.940	.115	.275	25	25-1/2	1/4
-475	25.940	.120	.275	26	26-1/2	1/4

## O-RINGS FOR TUBE FITTING BOSSES

AS568	— Dimensions in Inches —				— Dimensions in Millimeters —				O-Ring Volume (cubic inches)	— Tube Size —	
	I.D.	±	C/S	±	I.D.	±	C/S	±		OD	Dash No.**
-901	.185	.005	.056	.003	4.70	0.13	1.42	0.08	0.0019	3/32	
-902	.239	.005	.064	.003	6.07	0.13	1.63	0.08	0.0031	1/8	2
-903	.301	.005	.064	.003	7.65	0.13	1.63	0.08	0.0037	3/16	3
-904	.351	.005	.072	.003	8.92	0.13	1.83	0.08	0.0054	1/4	4
-905	.414	.005	.072	.003	10.52	0.13	1.83	0.08	0.0062	5/16	5
-906	.468	.005	.078	.003	11.89	0.13	1.98	0.08	0.0082	3/8	6
-907	.530	.007	.082	.003	13.46	0.18	2.08	0.08	0.0102	7/16	7
-908	.644	.009	.087	.003	16.36	0.23	2.21	0.08	0.0137	1/2	8
-909	.706	.009	.097	.003	17.93	0.23	2.46	0.08	0.0186	9/16	9
-910	.755	.009	.097	.003	19.18	0.23	2.46	0.08	0.0198	5/8	10
-911	.863	.009	.116	.004	21.92	0.23	2.95	0.10	0.0326	11/16	11
-912	.924	.009	.116	.004	23.47	0.23	2.95	0.10	0.0345	3/4	12
-913	.986	.010	.116	.004	25.04	0.25	2.95	0.10	0.0366	13/16	13
-914	1.047	.010	.116	.004	26.59	0.25	2.95	0.10	0.0386	7/8	14
-916	1.171	.010	.116	.004	29.74	0.25	2.95	0.10	0.0427	1	16
-918	1.355	.012	.116	.004	34.42	0.30	2.95	0.10	0.0489	1-1/8	18
-920	1.475	.014	.118	.004	37.47	0.36	3.00	0.10	0.0547	1-1/4	20
-924	1.720	.014	.118	.004	43.69	0.36	3.00	0.10	0.0631	1-1/2	24
-928	2.090	.018	.118	.004	53.09	0.46	3.00	0.10	0.0759	1-3/4	28
-932	2.337	.018	.118	.004	59.36	0.46	3.00	0.10	0.0843	2	32

\*\*The 900 series boss seals are designed to seal straight thread tube fittings when they are fastened into a boss. In this type of fitting the O-Ring is not located in a conventional rectangular groove. Rather, the seal is obtained when the gland components exert a diagonal squeeze through the O-Ring cross section.

O-RINGS

[sales@rtdygert.com](mailto:sales@rtdygert.com) • [www.rtdygert.com](http://www.rtdygert.com)

**MINNEAPOLIS**  
**12121 Nicollet Avenue S.**  
**Burnsville, MN 55337**  
**952.835.1700** PHONE  
**866.783.8883** TOLL FREE  
**952.835.1701** FAX

**CHICAGO**  
**2700 S. River Road, Suite 116**  
**Des Plaines, IL 60018**  
**847.675.1444** PHONE  
**800.423.9272** TOLL FREE  
**847.675.8889** FAX

**SEATTLE**  
**3902 W. Valley Hwy N., Suite 200**  
**Auburn, WA 98001**  
**253.218.0123** PHONE  
**877.796.0123** TOLL FREE  
**253.218.0121** FAX

© 2015, RT Dygert, Inc. Rev 12.16

**LIMITED WARRANTY** RT Dygert ("Seller") warrants that its products ("Goods") will perform in accordance with their specifications; that the goods will be free from manufacturing defects for a period of twelve (12) months from the date of delivery of the goods to Buyer; and that the goods will be as specified by Buyer in the purchase order. Seller should have the right to elect to either refund the purchase price for any defective goods or replace any defective goods, provided that the goods were used in the manner for which they were manufactured. Seller does not warrant that the goods are fit for any particular purpose. Seller should have no obligation to refund the purchase price or replace goods that are rendered defective by a Buyer or a third party after they leave Seller's place of shipment.

**LIMITED LIABILITY** Seller's liability for its goods is limited to their terms set forth in Seller's express warranty set for above, in no event shall Seller's liability exceed the total purchase order price. Seller is not assuming any liability for any indirect, collateral, special, incidental or consequential losses or damages suffered by Buyer, or by any end-user or other third party, including but not limited to, lost profits, loss of business reputation and/or lost business opportunity, for any possible cause of action or claim arising out of or related to the goods sold to Buyer, even if Seller has been advised of the possibility of such loss or damage.

